

# CHECK VALVES



**Check  
Valves**


**Screens**

**Foot  
Valves**

**Air Vac  
Breaker**





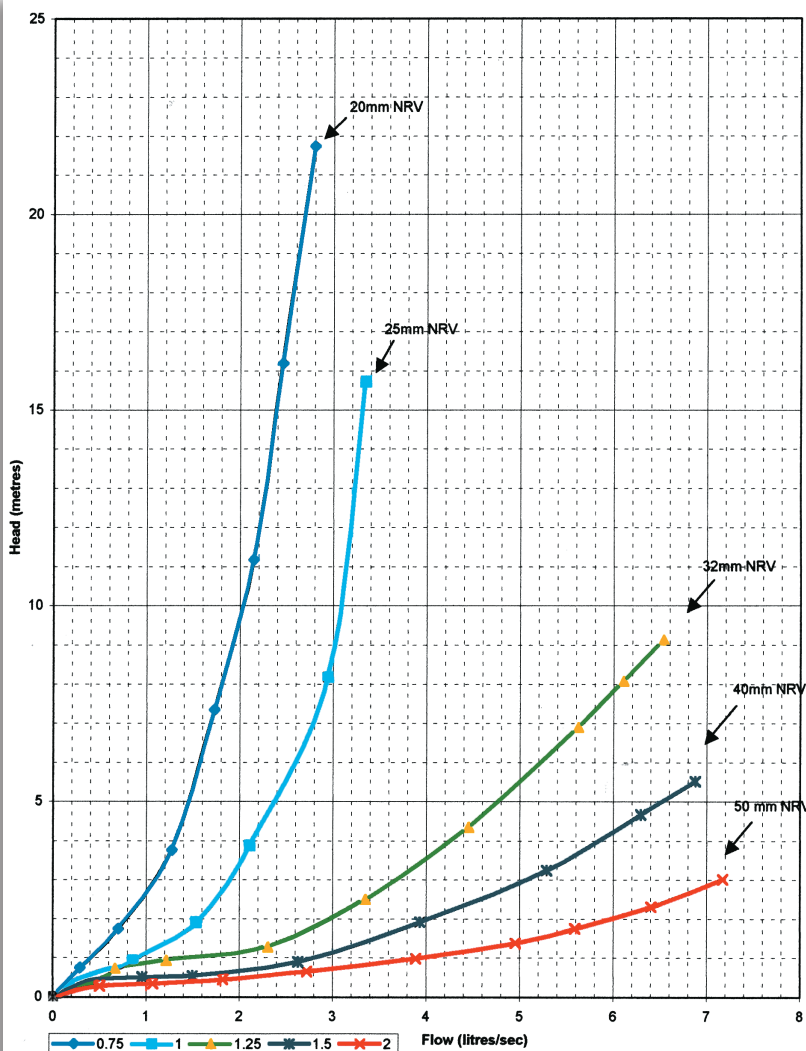

## Features:

- Spring Loaded
- Non-Corrosive
- Robust Design
- High Flow
- Horizontal - Vertical
- All valve components are serviceable

## Materials

Body: Glass Fibre Reinforced Nylon  
 Spring: 316 Stainless Steel  
 Plunger: Acetyl  
 Washer: Nitrile Rubber  
 O-Rings: Nitrile Rubber  
 Screens: Polypropylene  
 BSPT Threads

Manufactured to SGS Systems

**Maximum Working Pressure:**  
 16 bar (1600 kpa -230psi) @20°C

## Available sizes

ACV 15mm (1/2 inch)

ACV 20mm (3/4 inch)

ACV 25mm (1 inch)


ACV 32mm (1 1/4 inch)

ACV 40mm (1 1/2 inch)

ACV 50mm (2 inch)

## Dimensions

Size	15	20	25	32	40	50
A (mm)	85	85	90	110	122	139
B (mm)	46	46	54	64	74	90
C (mm)	-	137	147	177	194	219

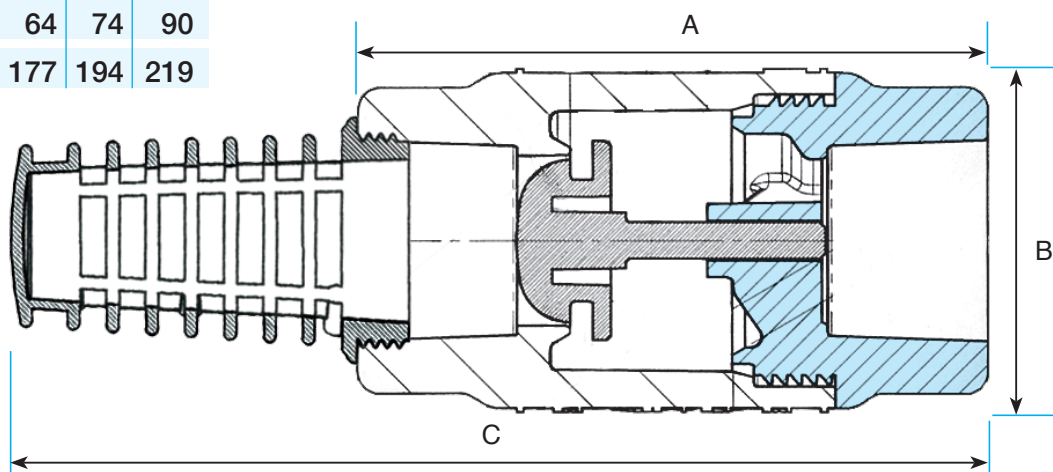

Supplied by

ANKA Products guarantee to replace any fitting, which fails due to manufacturing defect. ANKA Products do not accept any liability, due to consequential damage, or any associated cost involved in replacing ANKA Products.



ANKA

[www.qldirrig.com.au](http://www.qldirrig.com.au)