



ANKA™ polythene pipe fittings are quick and easy to fit. Simply push the pipe over the barbs up to the “stop” then tighten the **BLUE NUT**. The double barb gives a large surface area for the pipe to grip onto. In most situations **ANKA** Fittings can be fitted cold to pipe. The **ANKA** Double Barb is a feature of the 25mm-50mm fittings.



Step 1. Push the **ANKA** BLUE NUT fitting onto pipe.



Step 2. Tighten the **BLUE NUT** by hand then wrench.

Hose Nozzles



Hose Tails



Check Valves



Foot Valves



Screens



Pipe Unions



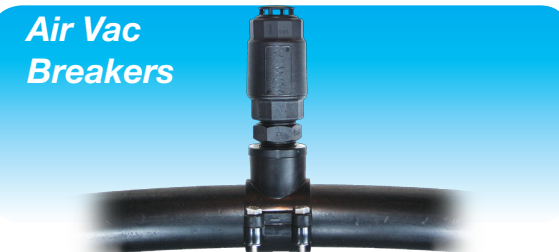
Swivels



Quick-Lock Couplings



Air Vac Breakers



Supplied by



ANKA PRODUCTS LTD
PO Box 101 128 NSMC, Auckland
Email: anka.products@extra.co.nz

www.ankaproducts.com

by/extra 011-40

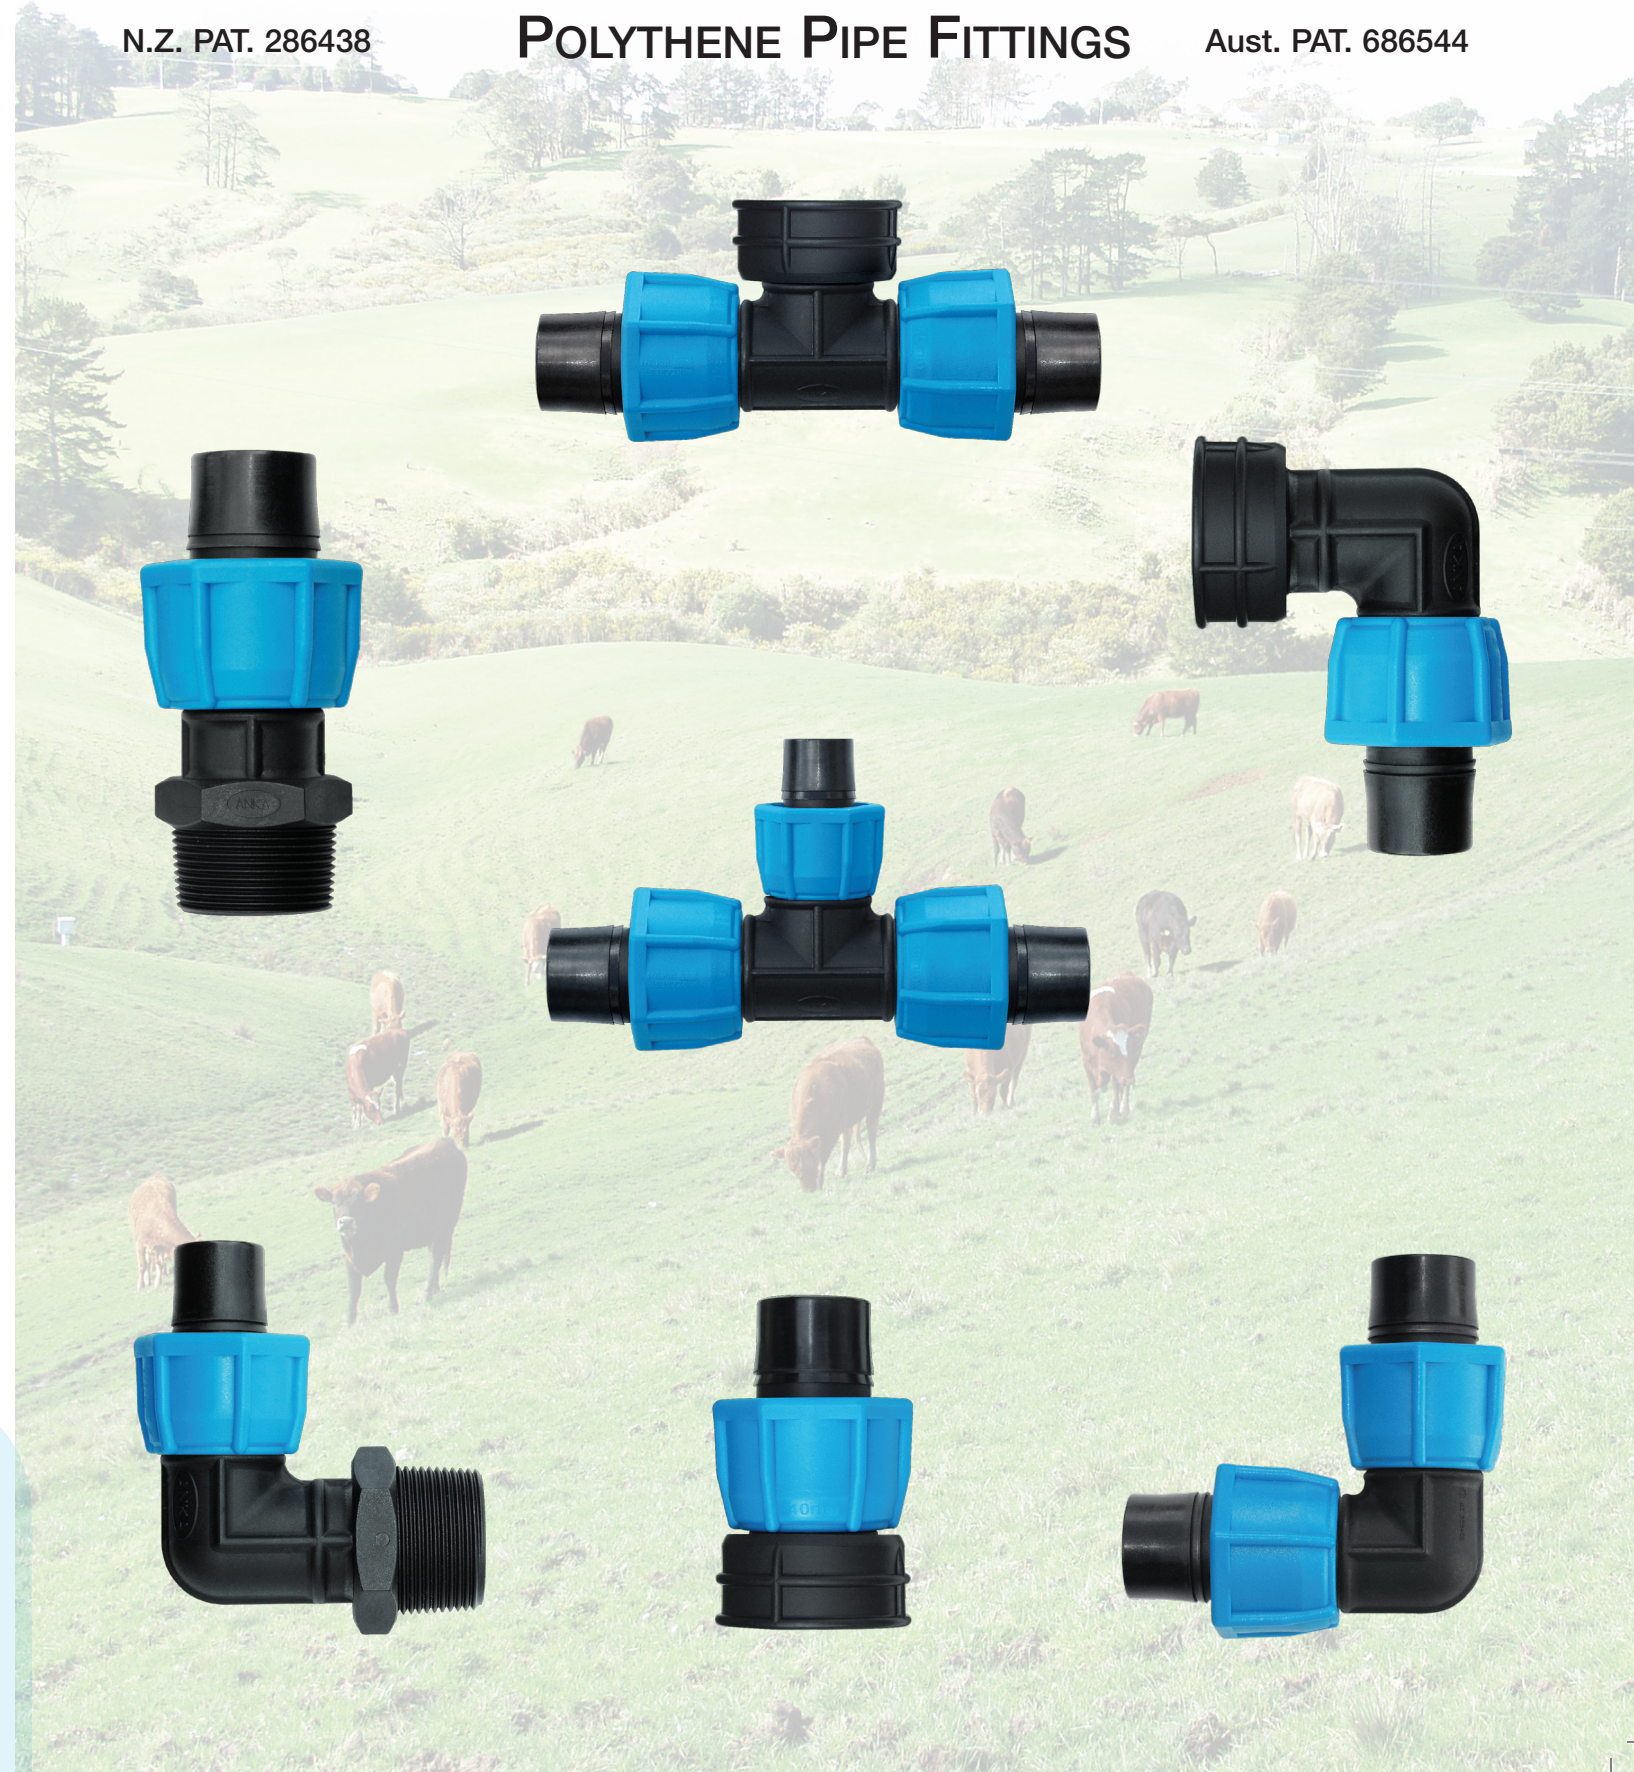
ANKA™ PIPE FITTINGS



N.Z. PAT. 286438

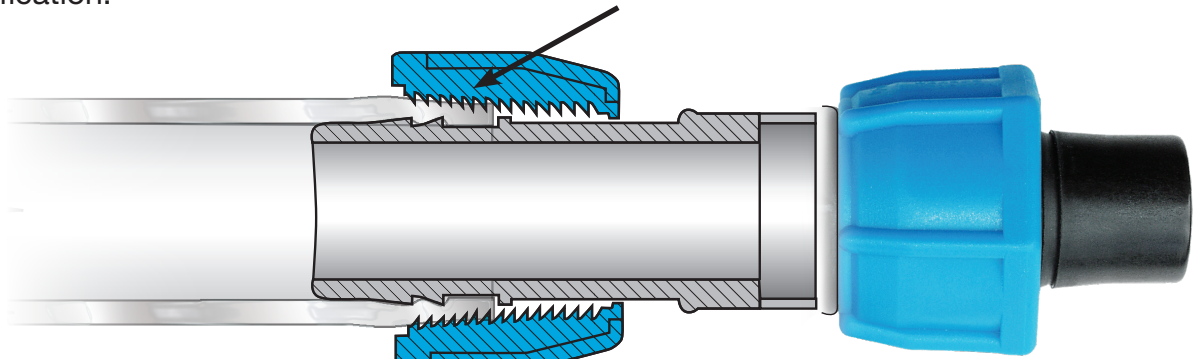
POLYTHENE PIPE FITTINGS

Aust. PAT. 686544



ANKA BLUE NUT
for easy identification.

• Once pipe is pushed over the sealing barbs, a ridge is created allowing the **BLUE NUT** to be tightened



• The captive **BLUE NUT** stays on fitting.


ANKA pipe fittings are used extensively in Agricultural, Horticultural, Irrigation and Industry.


Manufactured from high grade Glass Fibre Reinforced Nylon make these fittings strong and lightweight. They are designed to fit a large range of N.Z. polythene pipes, Australian Rural B, Irish imperial and a variety of flexible hoses, suction and pressure.

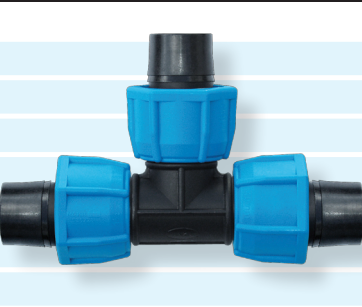
Threads: BSPT

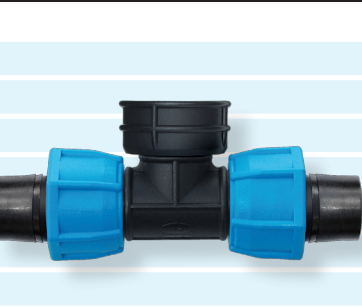
Maximum working pressure: 16 bar (1600kpa - 230psi) @20°C


Sizes from: 15mm – 50mm (1/2" – 2")


AFB	Anka Female Bend	mm	in
		15	1/2
		20	3/4
		25	1
		32	1 1/4
		40	1 1/2
		50	2


ARFB	Anka Reducing Female Bend	mm	in
		20 x 15	3/4 x 1/2
		20 x 25	3/4 x 1
		25 x 20	1 x 3/4
		32 x 25	1 1/4 x 1
		40 x 32	1 1/2 x 1 1/4
		50 x 40	2 x 1 1/2


AT	Anka Tee	mm	in
		15	1/2
		20	3/4
		25	1
		32	1 1/4
		40	1 1/2
		50	2

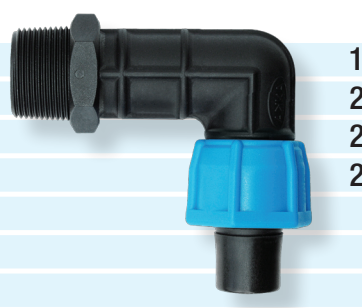
AFT	Anka Female Tee	mm	in
		15	1/2
		20	3/4
		25	1
		32	1 1/4
		40	1 1/2
		50	2


ART	Anka Reducing Tee	mm	in
		15 x 20	1/2 x 3/4
		20 x 15	3/4 x 1/2
		20 x 25	3/4 x 1
		25 x 15	1 x 1/2
		25 x 20	1 x 3/4
		32 x 20	1 1/4 x 3/4
		32 x 25	1 1/4 x 1
		40 x 25	1 1/2 x 1
		40 x 32	1 1/2 x 1 1/4
		50 x 32	2 x 1 1/4
		50 x 40	2 x 1 1/2


AMB	Anka Male Bend	mm	in
		15	1/2
		20	3/4
		25	1
		32	1 1/4
		40	1 1/2
		50	2


ARMB	Anka Reducing Male Bend	mm	in
		15 x 20	1/2 x 3/4
		20 x 15	3/4 x 1/2
		20 x 25	3/4 x 1
		25 x 20	1 x 3/4


AMBL	Anka Male Bend Long	mm	in
		15	1/2
		20	3/4
		25	1

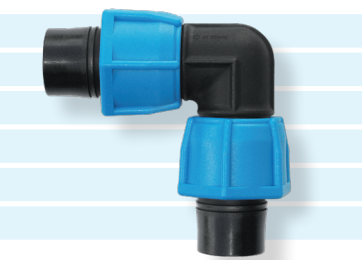
ARMBL	Anka Reducing Male Bend Long	mm	in
		15 x 20	1/2 x 3/4
		20 x 15	3/4 x 1/2
		20 x 25	3/4 x 1
		25 x 20	1 x 3/4


AFC	Anka Female Coupling	mm	in
		15	1/2
		20	3/4
		25	1
		32	1 1/4
		40	1 1/2
		50	2


ARFC	Anka Reducing Female Coupling	mm	in
		20 x 15	3/4 x 1/2
		25 x 20	1 x 3/4
		32 x 25	1 1/4 x 1
		40 x 32	1 1/2 x 1 1/4
		50 x 40	2 x 1 1/2


ASC	Anka Straight Coupling	mm	in
		15	1/2
		20	3/4
		25	1
		32	1 1/4
		40	1 1/2
		50	2


ARC	Anka Reducing Coupling	mm	in
		20 x 15	3/4 x 1/2
		25 x 15	1 x 1/2
		25 x 20	1 x 3/4
		32 x 20	1 1/4 x 3/4
		32 x 25	1 1/4 x 1
		40 x 25	1 1/2 x 1
		40 x 32	1 1/2 x 1 1/4
		50 x 40	2 x 1 1/2


AB	Anka Bend	mm	in
		15	1/2
		20	3/4
		25	1
		32	1 1/4
		40	1 1/2
		50	2


AMC	Anka Male Coupling	mm	in
		15	1/2
		20	3/4
		25	1
		32	1 1/4
		40	1 1/2
		50	2

ARMC	Anka Reducing Male Coupling	mm	in
		15 x 20	1/2 x 3/4
		20 x 15	3/4 x 1/2
		20 x 25	3/4 x 1
		25 x 15	1 x 1/2
		25 x 20	1 x 3/4
		32 x 20	1 1/4 x 3/4
		32 x 25	1 1/4 x 1

ASCL	Anka Straight Coupling Long	mm	in
		15	1/2
		20	3/4
		25	1

ABE	Anka Bracket Elbow	mm	in
		15	1/2
		15 x 20	1/2 x 3/4
		20	3/4
		20 x 15	3/4 x 1/2
		20 x 25	3/4 x 1

AU	Anka Union	mm	in
		20 x 20	3/4 x 3/4
		25 x 25	1 x 1
		32 x 32	1 1/4 x 1 1/4

AMT	Anka Male Tee	mm	in
		15 x 20	1/2 x 3/4
		20 x 20	3/4 x 3/4