




## Part Circle Brass Impact Sprinkler, 3/4" male

- High water distribution with spacing to 22m
- Full or part circle operation
- High quality brass
- Large body for high flows

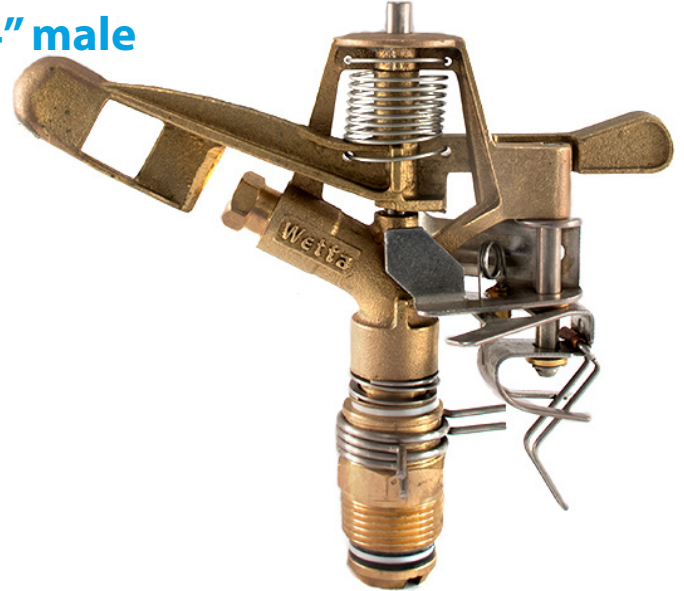

## Performance Table - W8034PC

Nozzle mm	P psi	P Kpa	Q m3/h	Q L/m	Diameter m
3.6	25	170	0.79	13.1	24.4
	30	206	0.89	14.8	25.0
	35	240	0.95	15.8	25.6
	40	275	1.02	16.7	26.2
	45	310	1.09	16.8	26.8
	50	345	1.16	19.3	27.4
	55	380	1.20	20.0	27.4
4.0	60	413	1.25	20.8	28.0
	25	170	0.98	16.3	25.0
	30	206	1.07	17.8	25.6
	35	240	1.16	19.3	26.2
	40	275	1.23	20.5	26.8
	45	310	1.29	21.5	27.4
	50	345	1.36	22.6	28.0
4.4	55	379	1.43	23.8	28.6
	60	413	1.48	24.6	28.6
	25	170	1.14	19.0	25.6
	30	206	1.25	20.8	26.2
	35	240	1.36	22.6	26.8
	40	275	1.45	24.1	27.4
	45	310	1.54	25.6	28.0
	50	345	1.64	27.3	28.6
	55	379	1.70	28.3	28.6
	60	413	1.77	29.5	29.2

Nozzle mm	P psi	P Kpa	Q m3/h	Q L/m	Diameter m
4.8	25	170	1.32	22.0	26.2
	30	206	1.45	24.2	26.8
	35	240	1.57	26.1	27.4
	40	275	1.68	28.0	28.0
	45	310	1.79	29.8	28.6
	50	345	1.91	31.8	28.6
	55	379	2.00	33.3	29.2
5.2	60	413	2.09	34.8	29.8
	25	170	1.57	26.1	26.8
	30	206	1.73	28.8	27.4
	35	240	1.88	31.3	28.0
	40	275	2.02	33.3	28.6
	45	310	2.13	35.5	29.2
	50	345	2.25	37.5	29.8
	55	379	2.34	39.0	29.8
	60	413	2.43	40.5	30.5